


Charakterystyki wentylatorów dachowych przeciwwybuchowych typu WDEx

Silnik

KPER-63G4
3~400V
0,18kW
0,66A
1380obr/min


WDEx-16-1380

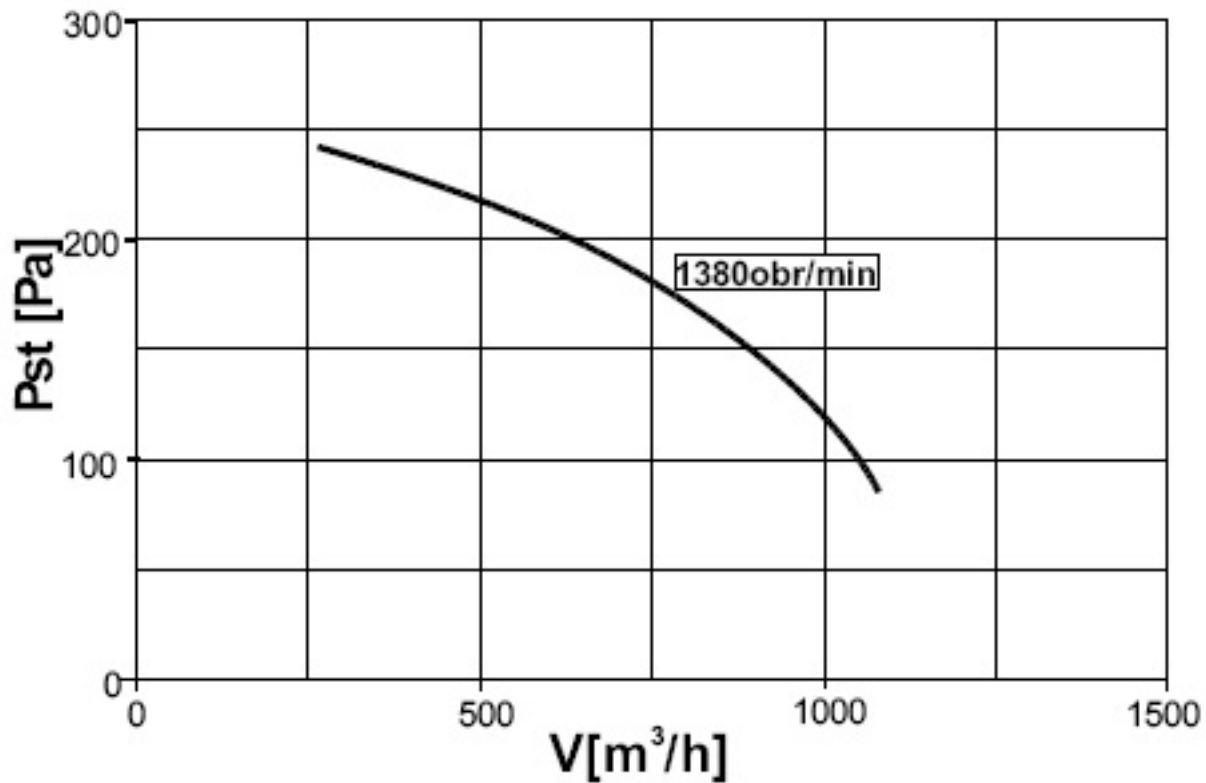

Silnik

KPER-71K4
3~400V
0,25kW
0,79A
1380obr/min


WDEX-20-1380

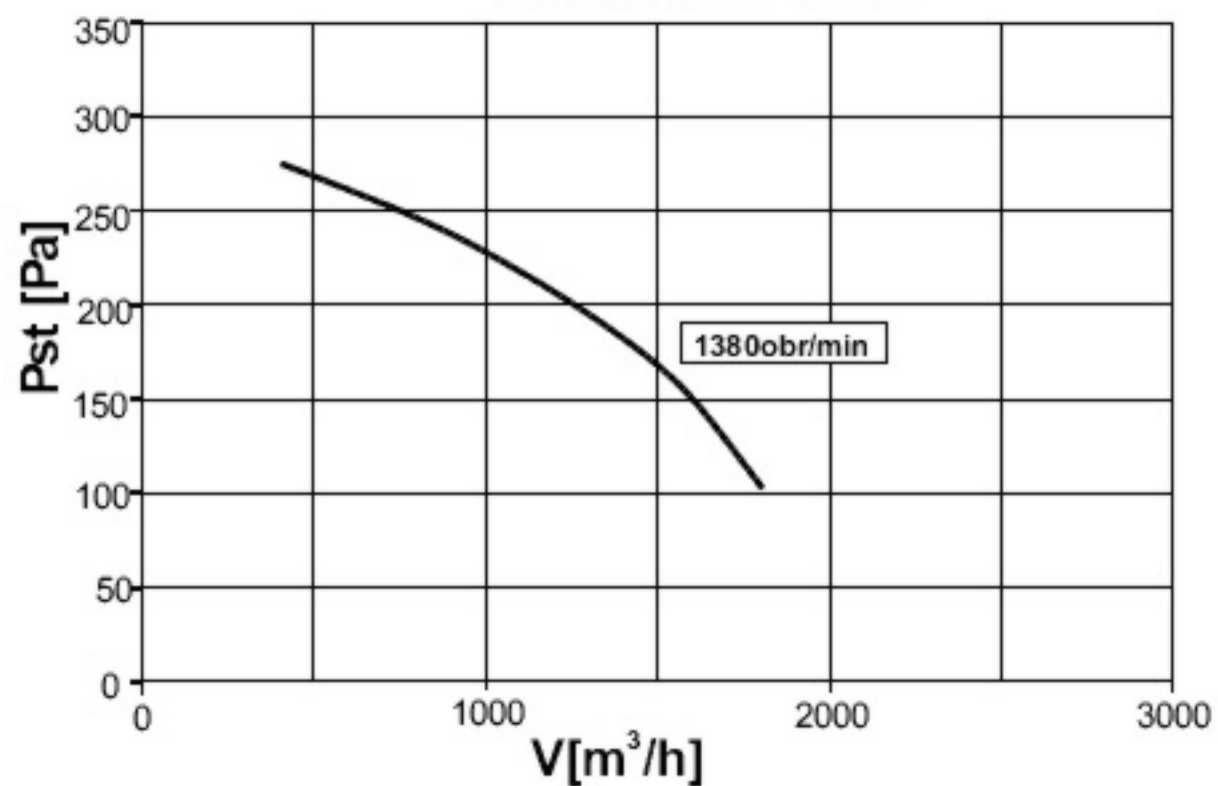

Silnik

KPER-71K4
3~400 V
0,25 kW
0,79 A
1380 obr/min


WDEx-25-1380

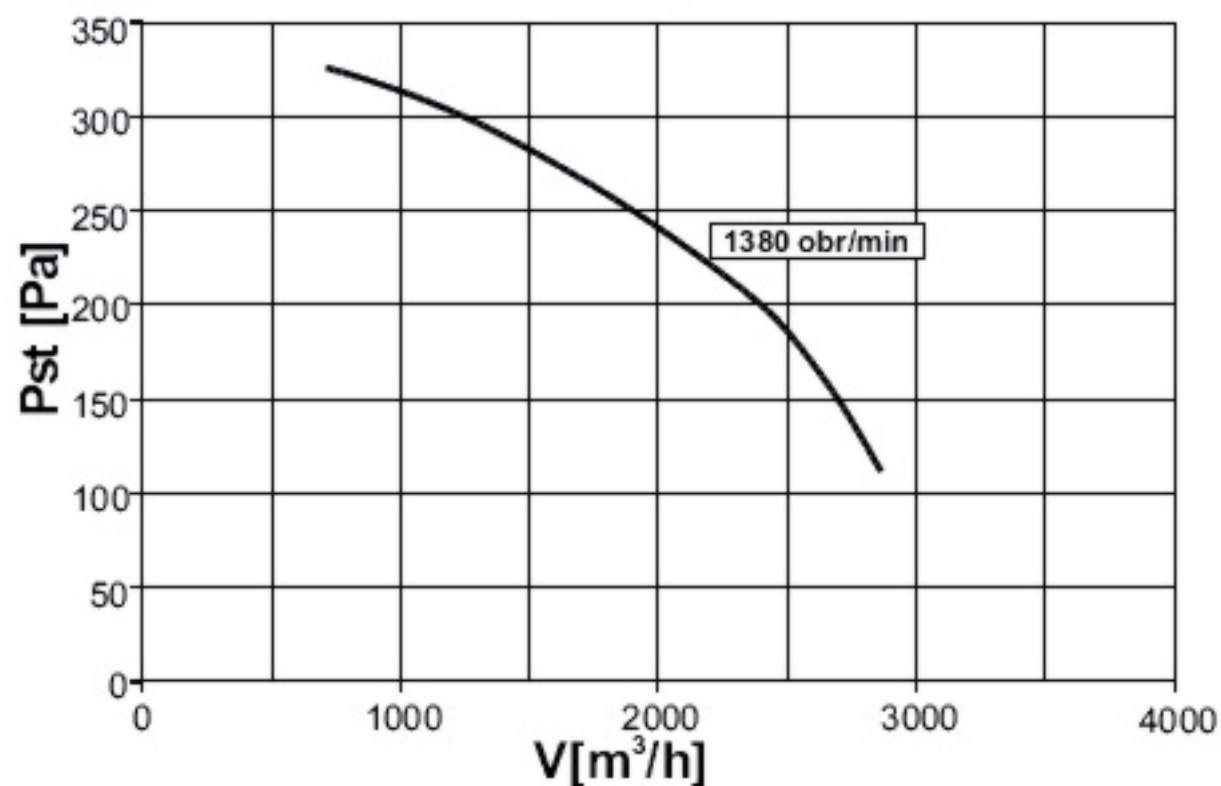

WDEx-31,5-920
WDEx-31,5-1380

Silniki

KPER-80K6	KPER-80K4
3~400 V	3~400 V
0,37 kW	0,55 kW
1,3 A	1,59 A
920 obr/min	1380 obr/min

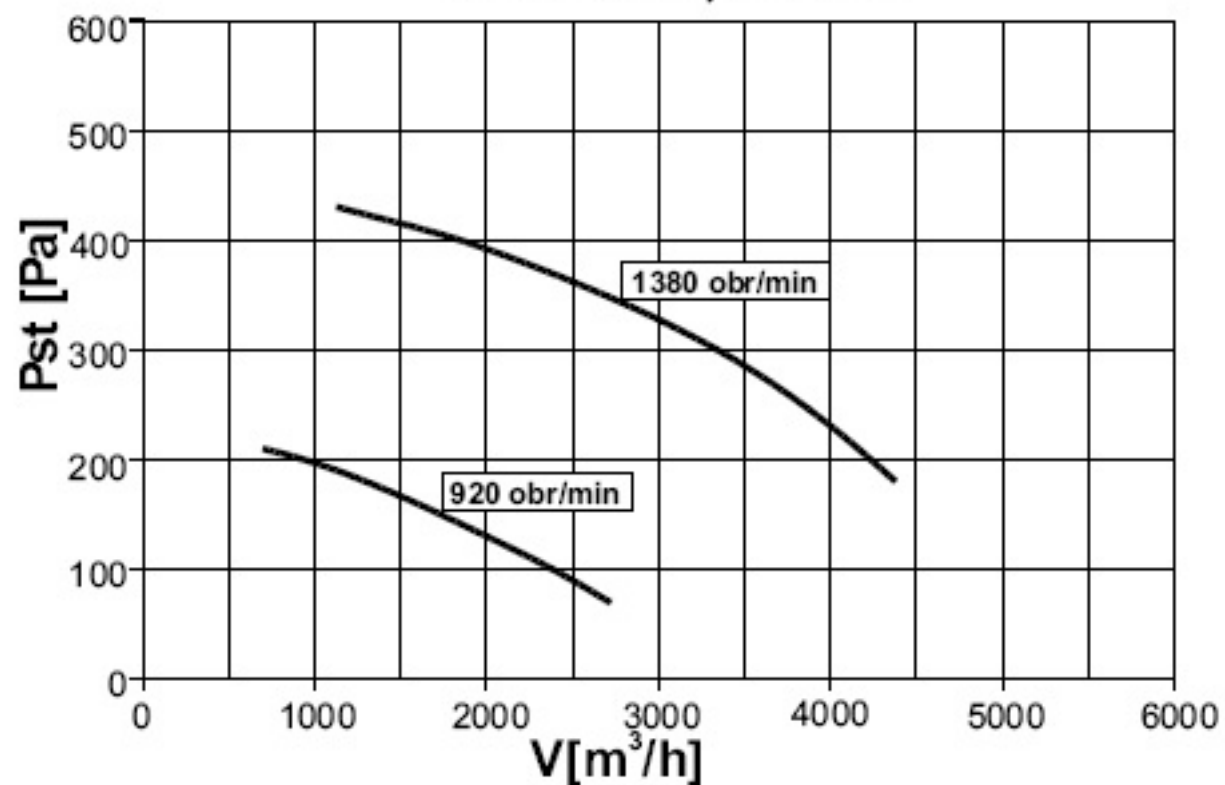

Silniki

KPER-90S8	KPER-90L6
3~400 V	3~400 V
0,37 kW	0,95 kW
1,69 A	2,85 A
700 obr/min	925 obr/min

WDEx-40-700

WDEx-40-925

